


- Samples can deviate in the execution from the serie.

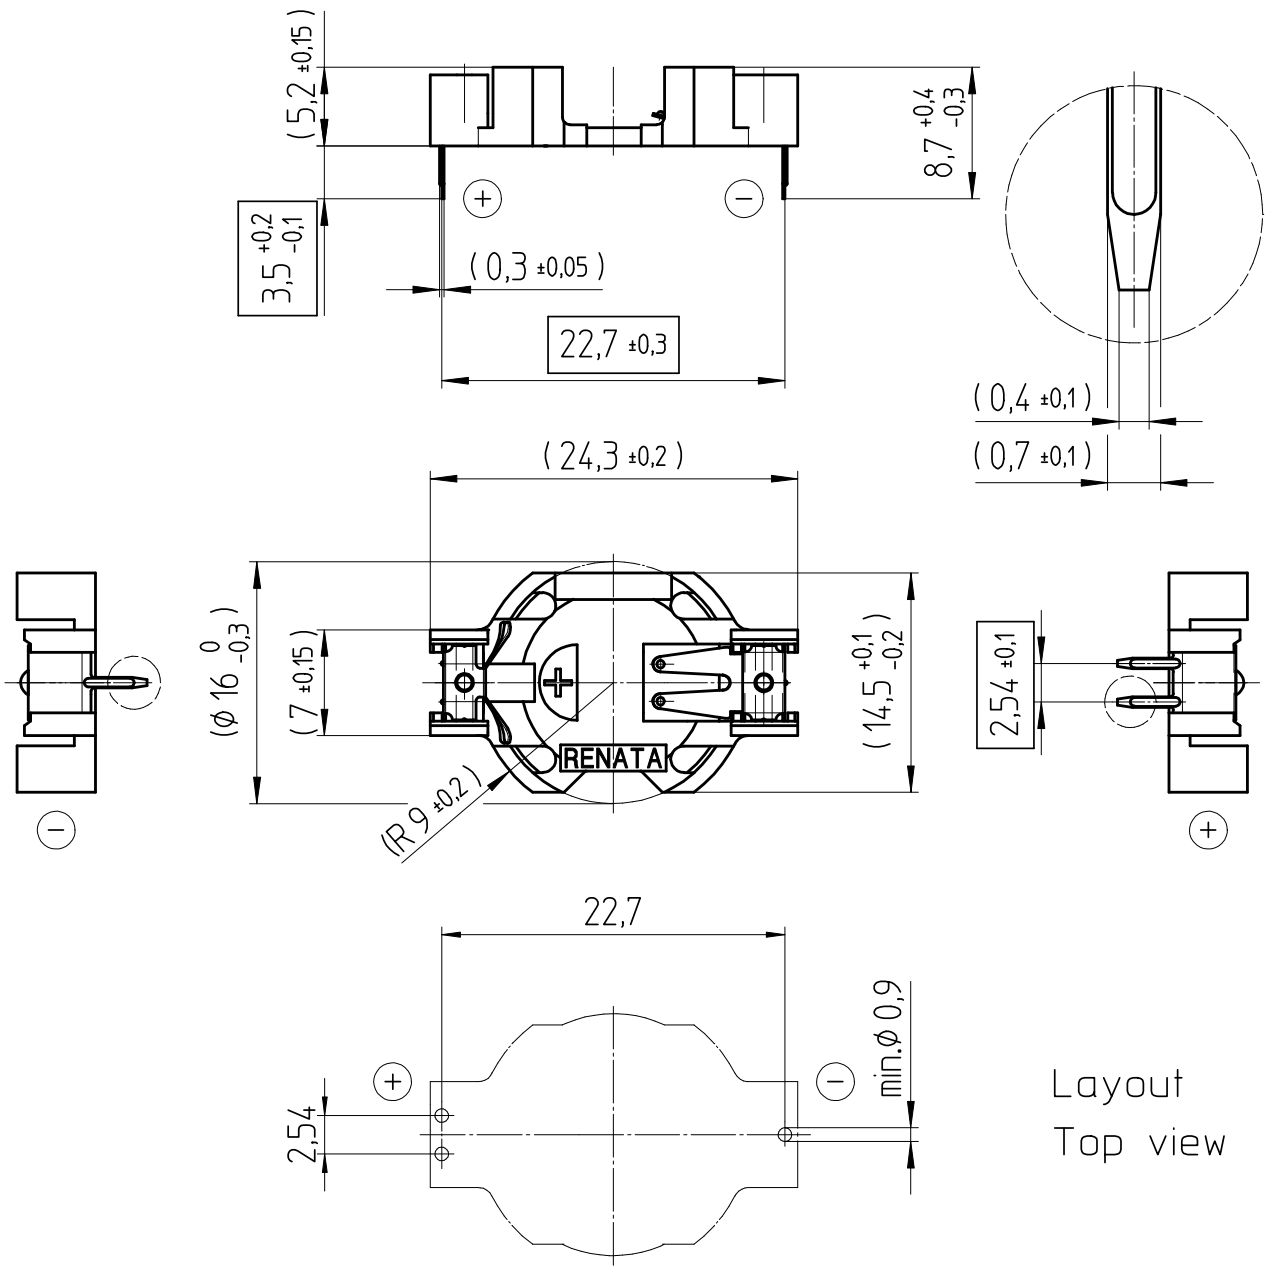

Layout
Top view

- Dimensions and tolerances can be specified only after the testing of the devices for the mass production definitely

- Holder material : heat resistant, glass-fiber reinforced LCP
- Battery contacts : spring stainless steel 301 nickel plated, thickness 10 μ m
- Solder contacts : spring stainless steel 301 solder plated throughout 100% Sn, thickness 10 μ m

All framed values will be used for dimension checking !

Rev.	①	10.09.07	MCi	Rev.	○			Customer's Approval		
Rev.	○			Rev.	○			Date		
Rev.	○			Rev.	○			Signature		
Titel:							Scale 2:1	Drawn	06.04.05	SRi
HU1632-LF								Checked	10.09.07	BBö
								Approved		
				CH-4452 Itingen Switzerland			3.8812.4-1			