

Cross Reference Guide

Tableau d'équivalences
Querverweisübersicht



renata
batteries

Renata	Maxell Panasonic Murata Toshiba								I.E.C. 60086-3 (60086-2)
	Energizer Eveready								
301	301	SR435W	V301	301	D 301/386	D	280-01	SB-A8	SR1142 (SR43)
303	303	SR445W	V303	303	D 303/357	A	280-08	SB-A9	SR1154 (SR44)
309	309	SR754SW	V309	309	D 309/393				SR754 (SR48)
315	315	SR716SW	V315	315		HA	280-56	SB-AT	SR716 (SR67)
317	317	SR516SW	V317	317		CA	280-58	SB-AR	SR516 (SR62)
319	319	SR527SW	V319	319	D 319		280-60	SB-AE/DE	SR527 (SR64)
321	321	SR616SW	V321	321		DA	280-73	SB-AF/DF	SR616 (SR65)
329	329	SR731SW	V329	329					SR731
335	335	SR512SW	V335	335			280-68	SB-AB	SR512
337	337	SR416SW		337					SR416
339	339	SR614SW	V339						SR614
341	341	SR714SW	V341	341					SR714
344	344	SR1136SW	V344	344					SR1136 (SR42)
346	346	SR712SW	V346	346			280-66	SB-DH	SR712
350	350		V350						SR1136 (SR42)
357	357	SR44W	V357	357	D 303/357	J	280-62	SB-B9	SR1154 (SR44)
361	361	SR721W	V361	361	D 361/362	X	280-53	SB-BK/EK	SR721 (SR58)
362	362	SR721SW	V362	362	D 361/362	S	280-29	SB-AK/DK	SR721 (SR58)
364	364	SR621SW	V364	364	D 364	T	280-34	SB-AG/DG	SR621 (SR60)
365	365	SR1116W							SR1116
366	366	SR1116SW	V366	366			280-46		SR1116
370	370	SR920W	V370	370	D 370/371	Z	280-51	SB-BN	SR921 (SR69)
371	371	SR920SW	V371	371	D 370/371		280-31	SB-AN	SR921 (SR69)
373	373	SR916SW	V373	373		WA	280-45	SB-AJ/DJ	SR916 (SR68)
376	376	SR626W		376	D 376		MA		SR626 (SR66)
377	377	SR626SW	V377	377	D 377	BA	280-39	SB-AW	SR626 (SR66)
379	379	SR521SW	V379	379	D 379	JA	280-59	SB-AC/DC	SR521 (SR63)
380		SR936W							SR936
381	381	SR1120SW	V381	381	D 381/391		280-27	SB-AS/DS	SR1121 (SR55)
384	384	SR41SW	V384	384	D 384/392		280-18	SB-A1/D1	SR736 (SR41)
386	386	SR43W	V386	386	D 301/386	H	280-41	SB-B8	SR1142 (SR43)
389	389	SR1130W	V389	389	D 389/390	M	280-15	SB-BU	SR1130 (SR54)
390	390	SR1130SW	V390	390	D 389/390		280-24	SB-AU	SR1130 (SR54)
391	391	SR1120W	V391	391	D 381/391	L	280-30	SB-B5/ES	SR1121 (SR55)
392	392	SR41W	V392	392	D 384/392	K	280-13	SB-B1	SR736 (SR41)
393	393	SR754W	V393	393	D 309/393	F		SB-B3	SR754 (SR48)
394	394	SR936SW	V394	394	D 394		280-17	SB-A4	SR936
395	395	SR927SW	V395	395	D 395/399	LA	280-48	SB-AP/DP	SR927 (SR57)
396	396	SR726W	V396	396	D 396/397	V	280-52	SB-BL	SR726 (SR59)
397	397	SR726SW	V397	397	D 396/397	N	280-28	SB-AL	SR726 (SR59)
399	399	SR927W	V399	399	D 395/399	W	280-44	SB-BP/EP	SR927 (SR57)
CR1025	CR1025	CR1025							CR1025
CR1216	CR/BR1216	CR/BR1216	CR1216	BR1216					CR1216
CR1220	CR1220	CR/BR1220	CR1220	CR1220	DL1220	PA		SB-T13	CR1220
CR1225	CR/BR1225	BR1225		BR1225					CR1225
CR1616	CR/BR1616	CR/BR1616	CR1616	BR1616	DL1616	YA	280-209		CR1616
CR1620	CR1620	CR1620	CR1620	CR1620	DL1620	EA	280-208		CR1620
CR1632		CR1632							CR1632
CR2016	CR/BR2016	CR/BR2016	CR2016	CR/BR2016	DL2016	FA	280-202/4/6	SB-T11	CR/BR2016
CR2025	CR2025	CR2025	CR2025	CR2025	DL2025	NA	280-205	SB-T14	CR2025
CR2032	CR/BR2032	CR/BR2032	CR2032	CR2032	DL2032			SB-T15	CR2032
CR2320	BR2320	CR/BR2320	CR2320	BR2320			280-201		CR/BR2320
CR2325	BR2325	BR2325		BR2325				SB-T12	CR2325
CR2430	CR2430	CR2430	CR2430	CR2430	DL2430				CR2430
CR2450N	CR2450	CR2450	CR2450		DL2450				CR2450
CR2477N	CR2477	CR2477			DL2477				CR2477

Renata	Rayovac	Duracell Activair	Energizer	Energizer Amplifier	Power One	Panasonic	Toshiba	I.E.C.
10	10A	DA 10	AC230E/EZ	AC230	P10	PR230H	ZA10	PR70
312	312A	DA 312	AC312E/EZ	AC312	P312	PR312H	ZA312	PR41
13	13A	DA 13	AC13E/EZ	AC13	P13	PR13H	ZA13	PR48
675	675A	DA 675	AC675E/EZ	AC675	P675	PR675H	ZA675	PR44



Renata - The worldclass leader in coin and button cells.

Renata is a leading manufacturer and supplier of micro batteries for use in medical devices, disposable medical sensors, watches and a wide range of other electronic applications. The company offers a broad portfolio of silver oxide, lithium and zinc-air batteries.

Renata covers the entire battery production process in-house, including punching battery housings, injection moulding plastic seals, sourcing raw materials, mixing cathode and anode compounds, and completing final assembly and quality control.

Renata's products are distinguished by clear differentiation between high-drain and low-drain cells, which is essential for meeting the demanding technical requirements of the watch industry and many other applications.

Please contact:

Renata SA
Kreuzenstrasse 30
CH-4452 Itingen, Switzerland
+41 61 975 75 75
sales@renata.com



The micro battery brand for professionals



We're in charge of micro batteries

We power millions of devices worldwide with the highest-quality micro batteries,
delivering reliable performance across a wide range of applications.

Scope of Supply

Gamme de produits
Lieferprogramm



renata
batteries

Chemical System Système chimique Chemisches System	Dimensions Dimensions Dimensionen	Renata No.	I.E.C. Code	Capacity Capacité Kapazität
Silver oxide (low drain) 1.55 V Oxyde d'argent (low drain) 1.55 V Silberoxyd (low drain) 1.55 V	4.8 × 1.6 mm 5.8 × 1.2 mm 5.8 × 1.6 mm 5.8 × 2.1 mm 5.8 × 2.7 mm 6.8 × 1.4 mm 6.8 × 1.6 mm 6.8 × 2.1 mm 6.8 × 2.6 mm 7.9 × 1.2 mm 7.9 × 1.4 mm 7.9 × 1.6 mm 7.9 × 2.1 mm 7.9 × 2.6 mm 7.9 × 3.1 mm 7.9 × 3.6 mm 7.9 × 5.4 mm 9.5 × 1.6 mm 9.5 × 2.0 mm 9.5 × 2.7 mm 9.5 × 3.6 mm 11.6 × 1.6 mm 11.6 × 2.1 mm 11.6 × 3.1 mm 11.6 × 3.6 mm 11.6 × 4.2 mm 11.6 × 5.4 mm	337 335 317 379 319 339 321 364 377 346 341 315 362 397 329 384 309 373 371 395 394 366 381 390 344 301 303	SR416SW SR512SW SR516SW SR521SW SR527SW SR614SW SR616SW SR621SW SR626SW SR712SW SR714SW SR716SW SR721SW SR726SW SR731SW SR41SW SR754SW SR916SW SR920SW SR927SW SR936SW SR1116SW SR1120SW SR1130SW SR1136SW SR43SW SR44SW	8 mAh 6 mAh 10.5 mAh 16 mAh 21 mAh 11 mAh 14.5 mAh 19 mAh 24 mAh 9.5 mAh 15 mAh 23 mAh 23 mAh 32 mAh 37 mAh 45 mAh 80 mAh 29 mAh 35 mAh 55 mAh 80 mAh 47 mAh 50 mAh 60 mAh 105 mAh 130 mAh 175 mAh
Silver oxide (high drain) 1.55 V Oxyde d'argent (high drain) 1.55 V Silberoxid (high drain) 1.55 V	6.8 × 2.6 mm 7.9 × 2.1 mm 7.9 × 2.6 mm 7.9 × 3.6 mm 7.9 × 5.4 mm 9.5 × 2.0 mm 9.5 × 2.7 mm 9.5 × 3.6 mm 11.6 × 1.6 mm 11.6 × 2.1 mm 11.6 × 3.1 mm 11.6 × 3.6 mm 11.6 × 4.2 mm 11.6 × 5.4 mm	376 361 396 392 393 370 399 380 365 391 389 350 386 357	SR626W SR721W SR726W SR41W SR754W SR920W SR927W SR936W SR1116W SR1120W SR1130W SR1136W SR43W SR44W	27 mAh 24 mAh 32 mAh 45 mAh 80 mAh 40 mAh 53 mAh 82 mAh 47 mAh 50 mAh 80 mAh 105 mAh 130 mAh 160 mAh
Lithium 3 V	10.0 × 2.5 mm 12.5 × 1.6 mm 12.5 × 2.0 mm 12.5 × 2.5 mm 16.0 × 1.6 mm 16.0 × 2.0 mm 16.0 × 3.2 mm 20.0 × 1.6 mm 20.0 × 2.5 mm 20.0 × 3.2 mm 23.0 × 2.0 mm 23.0 × 2.5 mm 24.5 × 3.0 mm 24.5 × 5.0 mm 24.5 × 7.7 mm	CR1025 CR1216 CR1220 CR1225 CR1616 CR1620 CR1632 CR2016 CR2025 CR2032 CR2320 CR2325 CR2430 CR2450N CR2477N	CR1025 CR1216 CR1220 CR1225 CR1616 CR1620 CR1632 CR2016 CR2025 CR2032 CR2320 CR2325 CR2430 CR2450 CR2477	30 mAh 25 mAh 35 mAh 48 mAh 50 mAh 68 mAh 137 mAh 104 mAh 180 mAh 260 mAh 150 mAh 190 mAh 285 mAh 540 mAh 950 mAh
Zinc air, 1.45 V Zinc air, 1.45 V Zink-Luft, 1.45 V	5.8 × 3.6 mm 7.9 × 3.6 mm 7.9 × 5.4 mm 11.6 × 5.4 mm	10 312 13 675	PR70 PR41 PR48 PR44	105 mAh 165 mAh 305 mAh 660 mAh

0%
MERCURY



0%
MERCURY



0%
MERCURY



Silver Oxide Batteries

Piles à l'oxyde d'argent
Silberoxidbatterien

Multi Packaging – MP



MP

MP-E

10



MP-E: 362, 364, 371, 377, 390, 394 and 395 only

100

Single Packaging – SP



1



10




100





Industrial Bulk – IB

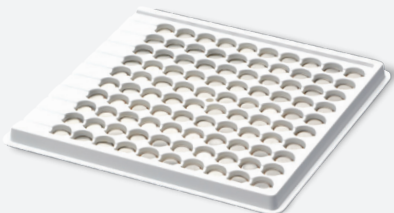

100



500 / 1000



MP/CU/SC Display Stand
6000379



MP Box | 6000330



SP Box | 6000491

Lithium Batteries

Piles au lithium
Lithiumbatterien



Secured Card – SC



1



6



180



2

4



20

40



200 / 400

Industrial Bulk – IB



25/50/100



Misc.

Hearing Aid Batteries

Piles auditives
Hörgerätebatterien



Dial Packaging – DP



6



60/300



ZA-Display 0% Hg
6000414

Service Accessories

Accessoires de service
Zubehör



Tweezers
ZW9802




Polishing cloth
ZW9820



Battery Tester BWT94
101118



Watchmakers Knife
ZW9810



Battery selector
ZW9801