

ICP621333HPMT

Rechargeable Lithium Ion Polymer Battery Pack 3.8 V

Safety Circuit, NTC

Specifications

Renata Type	ICP621333
IEC Designation	ICP071335
Part Number	101027
Contact Method:	Wire AWG 30
Safety Circuit	Yes, incl. NTC

Nominal Voltage	3.8 V
Typical Capacity	270 mAh
Minimum Capacity	260 mAh (0.2C cut off 3.0 V at 20°C)

Internal Impedance	< 330 mΩ / 30% SOC
--------------------	--------------------

Thickness (t)	Max 6.8 mm (after 500 cycles)
Length (l)	Max 35 mm (after 500 cycles)
Width (w)	Max 13 mm (after 500 cycles)
Weight	~ 5.6 g

Charging Characteristic

Voltage	CC/CV – Constant Current / Constant Voltage
Current Normal	4.35 V CV
Max. Charging Current	0.5 C CC – 135 mA
Temperature at Charging	1.0 C CC – 270 mA
	0 °C 45 °C

Discharge Characteristic

Cut off Voltage	3.0 V
Max discharge Current	2.0 C – 540 mA (for non continues discharge)
	1.0 C – 270 mA (for continues discharge)
Temperature during Discharge	-20 °C ... 60 °C

Cycle Life at Room Temperature	> 80% of minimum capacity after 500 cycles (0.5 C charge, 0.5 C discharge)
--------------------------------	--

Storage Temperature	-20 °C ... 45 °C (0 °C ... 30 °C recommended in case of storage for more than 3 months)
---------------------	---

Dimensions

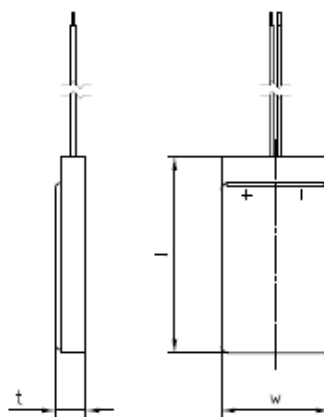


Illustration only. For detailed drawing please contact your sales representative.

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the ASDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use